

VASH #4 PALMS

Permit-Seal

File Name: #43-040

Drawing No.

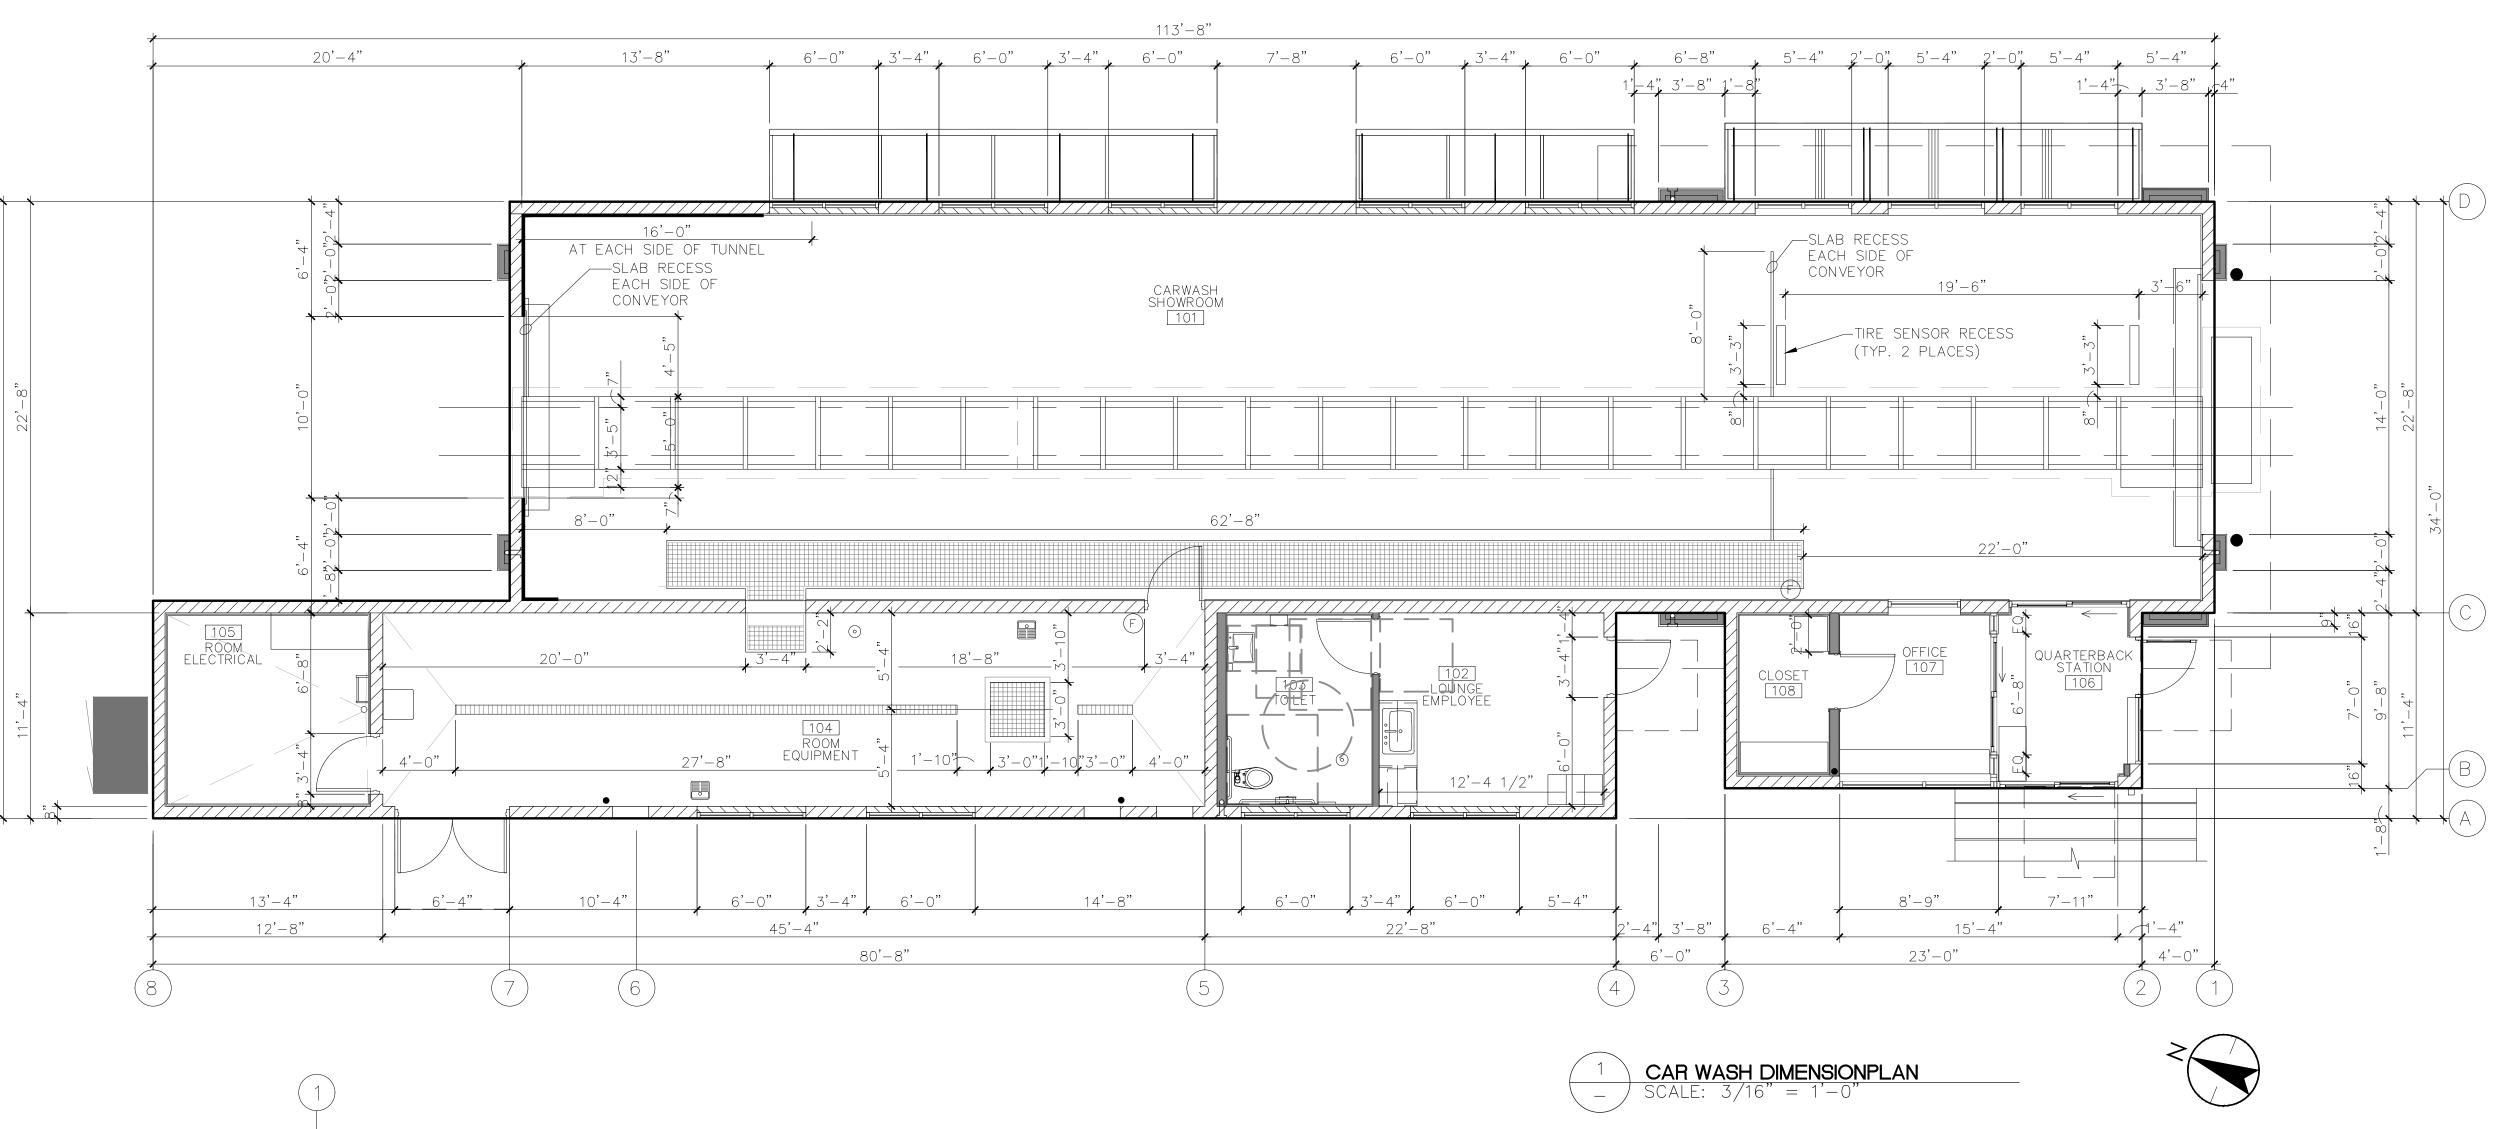

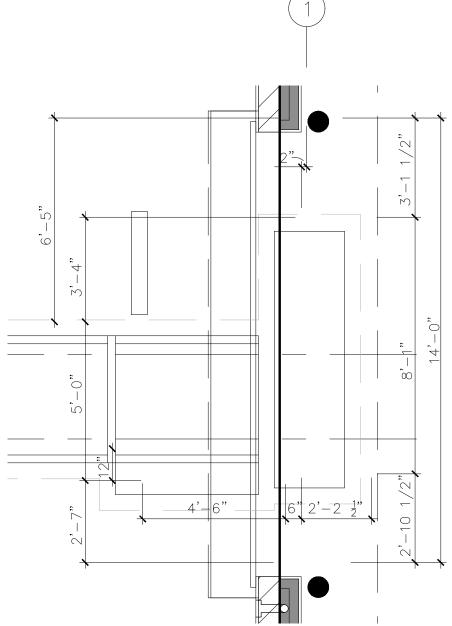

DIMENSION AT ENTRANCE

DIMENSION NOTES:

- 1. IN NO CASE SHALL WORKING DIMENSIONS BE SCALED FROM PLANS, SECTIONS OR DETAILS ON DRAWINGS.
- 2. ALL DIMENSIONS TO OPENINGS ARE TO FACE OF MASONRY UNLESS OTHERWISE NOTED.
- 3. ALL DIMENSIONS TO STUD WALL PARTITIONS ARE TO THE FACE OF FINISH UNLESS OTHERWISE NOTED.
- 5. FINISH FLOOR ELEVATIONS NOTED ARE REFERENCED FROM DATUM POINT O'-O" AT EQUIPMENT ROOM FINISH FLOOR AT DOOR THRESHOLD.
- 6. ALL DIMENSIONS SHALL BE VERIFIED IN THE FIELD PRIOR TO FABRICATION OF ANY INSTALLATIONS.
- 7. DIMENSIONS ARE NOT ADJUSTABLE WITHOUT

4. GRID LINES ARE TO FACE OF MASONRY.

APPROVAL OF ARCHITECT IN WRITING. 8. MINIMUM AND MAXIMUM DIMENSIONS AND SLOPES AS REQUIRED FOR DISABLED ACCESS ARE TO TAKE PRECEDENCE IN ALL CASES OF CONFLICT. CODE REQUIRED MINIMUMS AND MAXIMUMS ARE TO BE EXCEEDED WHERE POSSIBLE AND WHERE NOTED. NOTIFY ARCHITECT OF ANY DIMENSIONAL

DISCREPANCIES PRIOR TO CONSTRUCTION.

9. DIMENSIONS AND GRAPHIC REPRESENTATIONS OCCURRING ON LARGER SCALED DRAWINGS SHALL TAKE PRECEDENCE OVER SMALLER SCALE DRAWINGS.

RATED WEST WALL NOTES:

- 1. WEST EXTERIOR WALL IS REQUIRED TO BE OF ONE HOUR MINIMUM CONSTRUCTION PER CBC TABLE 602. CMU WALL SHOWN MEETS REQUIREMENTS OF CBC TABLE 721.1 (2) ITEM 3-1.4. METAL STUD PARAPET WALL MEETS REQUIREMENTS OF CBC TABLE 721.1 (2) ITEM 15-1.4.
- 2. METAL WALL CANOPY AND ROOF OVERHANG (8X3)) = 48"
- 3. OPENINGS ARE LIMITED TO 10% OF WALL AREA PER CBC TABLE 705.8. (277 SQ. FT. X 10% = 27.7). NO OPENINGS PROPOSED AT THIS WALL.

WALL TYPES

8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH A 3'-4" HIGH SPLIT FACE 8X8X16 CONCRETE MASONRY UNIT WAINSCOT. INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR TO MATCH. INTERIOR FINISH: 12'-0" HIGH PVC WALL PANEL SYSTEM OVER SEALED CMU - SEE ROOM FINISH SCHEDULE. SEE NOTES FOR RATED

NORTH WALL. 8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH A 3'-4" HIGH SPLIT FACE 8X8X16 CONCRETE MASONRY UNIT WAINSCOT. INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR TO MATCH. INTERIOR FINISH: PREP AND PAINT — SEE

> FINISH SCHEDULE 8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH A 3'-4" HIGH SPLIT FACE 8X8X16 CONCRETE MASONRY UNIT WAINSCOT. INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR TO MATCH. INTERIOR FINISH: 1/2" PLYWOOD OVER HORIZONTAL 7/8" GALVANIZED METAL HAT CHANNELS SPACED AT 24" o.c. - SEE FINISH


SCHEDULE 8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH A 3'-4" HIGH SPLIT FACE 8X8X16 CONCRETE MASONRY UNIT WAINSCOT. INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR TO MATCH. INTERIOR FINISH: SMOOTH FIBER REINFORCED POLYESTER WALL PANELS OVER 1/2" PLYWOOD OVER HORIZONTAL 7/8" GALVANIZED

METAL HAT CHANNELS SPACED AT 24" o.c. - SEE FINISH SCHEDULE

8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH. INTERIOR FINISH: 12'-0" HIGH PVC WALL PANEL SYSTEM OVER SEALED CMU OR 1/2" PLYWOOD OVER HORIZONTAL 7/8" GALVANIZED METAL HAT CHANNELS SPACED AT 24" o.c. — SEE FINISH SCHEDULE

8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH. INTERIOR FINISH: 12'-0" HIGH PVC WALL PANEL SYSTEM OVER SEALED CMU OR PREP AND PAINT - SEE FINISH SCHEDULE

8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH. INTERIOR FINISH: 12'-0" HIGH PVC WALL PANEL SYSTEM OVER SEALED CMU OR SMOOTH FIBER REINFORCED POLYESTER WALL PANELS OVER 1/2" PLYWOOD OVER HORIZONTAL 7/8" GALVANIZED METAL HAT CHANNELS SPACED AT 24" o.c - SEE FINISH SCHEDULE



8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH. INTERIOR FINISH: FURRED PLUMBING WALL. 6" METAL STUD WALL FRAMING AT 16" o.c. WITH FRP WALL PANELS OVER 1/2" PLYWOOD. OR PREP FOR PAINT - SEE FINISH

4X8X16 CONCRETE MASONRY UNIT WALL CONSTRUCTION INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH AND 1/4" SPANDREL GLASS WITH CERAMIC

> 8X8X16 CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH. INTERIOR FINISH: 12'-0" HIGH PVC WALL PANEL SYSTEM OVER SEALED CMU OR FRP WALL PANELS OVER 1/2" PLYWOOD OVER HORIZONTAL 7/8" GALVANIZED METAL HAT CHANNELS SPACED AT 24" o.c. — SEE FINISH SCHEDULE

FRIT. INTERIOR FINISH: PRÉP FOR PAINT SEE FINISH SCHEDULE

4X8X16 CONCRETE MASONRY UNIT WALL CONSTRUCTION INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR. MORTAR COLOR TO MATCH AND 1/4" SPANDREL GLASS WITH CERAMIC FRIT. INTERIOR FINISH: 12'-0" HIGH PVC WALL PANEL SYSTEM OVER SEALED CMU OR ACOUSTICBLOCK PANEL/LINER - SEE ROOM FINISH SCHEDULE.

EXTERIOR METAL STUD FURRED WALL FEATURE: THREE COAT CEMENT PLASTER WALL FINISH. SAND FINISH ACRYLIC COLOR COAT OVER BROWN COAT OVER SCRATCH COAT OVER STUCCO MESH OVER TWO LAYERS GRADE D PAPER OVER 5/8" DENS GLASS GOLD WALL SHEATHING.

3 5/8" METAL STUD WALL FRAMING AT 16" o.c. WITH FRP WALL PANELS OVER 1/2" PLYWOOD EACH SIDE. - AT ELECTRICAL ROOM PROVIDE PLYWOOD ONLY

6" METAL STUD WALL FRAMING AT 16" o.c. WITH FRP WALL PANELS OVER $\frac{1}{2}$ " PLYWOOD.


3 5/8" METAL STUD WALL FRAMING AT 16" o.c. WITH 1/2" PLYWOOD EACH SIDE.

8X8X16 HONED CONCRETE MASONRY UNIT WALL CONSTRUCTION WITH A 3'-4" HIGH SPLIT FACE 8X8X16 CONCRETE MASONRY UNIT WAINSCOT. INTEGRAL WATER REPELLANT ADMIXTURE MASONRY AND MORTAR TO MATCH. INTERIOR FINISH: ACOUSTICBLOK WALL PANEL/LINER SYSTEM


PROJECTIONS ARE LIMITED TO 4'-0" PROJECTION PER CBC 705.2.: 24" + 8" PER FOOT BEYOND 3'-0" OF FIRE SEPARATION DISTANCE - AT 6'-0" F.S.D. (24 +

















OVER SEALED CMU