

January 31, 2022

PUBLIC OUTREACH MEETING

Onaga Trail Pedestrian Improvement Project

Town Project No. 7005-2020; ATP No. 5466(025)

and

Little League Drive Pedestrian Improvement Project

Town Project No. 8970-2020; ATP No. 5466(024)



SUMMARY

- The 1st Public Outreach Meeting was held on September 16, 2021.
- Since then:
 - Town staff met with numerous property owners to address different issues:
 - Driveways
 - Curb and gutter
 - Mailboxes
 - Chain link fences
 - Project Plans are 95% developed



Town Project No. 7005-2020 ATP No. 5466(025)



Project Description


- The project is located on Onaga Trail between Acoma Trail and approximately Grand Avenue.
- It is divided in two (2) segments due to existing constraints to meet the General Plan designation. (Arterial 4 Lane Divided 100' ROW)
- Both segments would have full width pavement, curb and gutter, handicap ramps, and sidewalk on both sides of Onaga Trail.
- This would result in sidewalks on both sides of Onaga Trail, between Sage Avenue and Acoma Trail.



Proposed Improvements


1st Segment - Onaga Street, between Acoma Trail and Church Street

ACOMA TRAIL TO CHURCH ST.

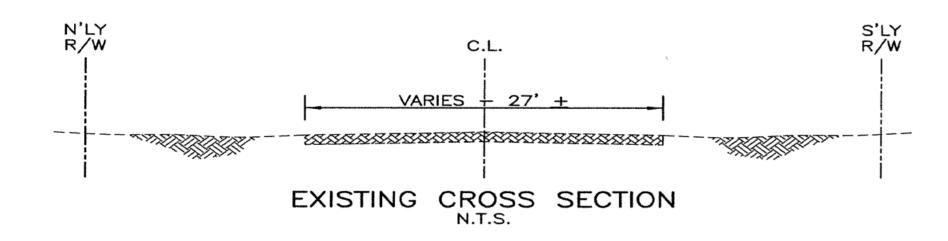

Improved to a local road standard of 60 foot right of way.

No additional right of way would be required.

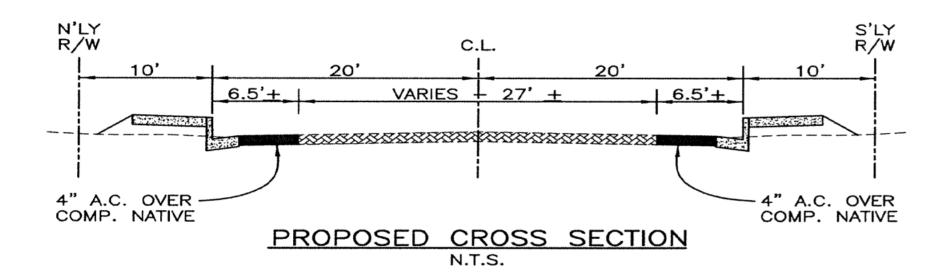



Improvements can be constructed with minimal impact to the existing residences.



2nd Segment - Onaga Street, between Church Street and approximately Grand Avenue

CHURCH ST. TO SAGE AVE.

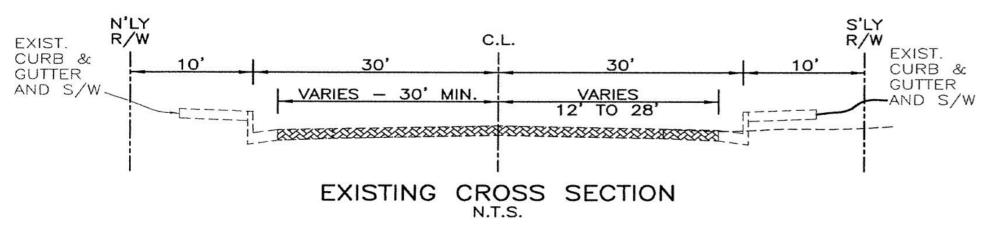

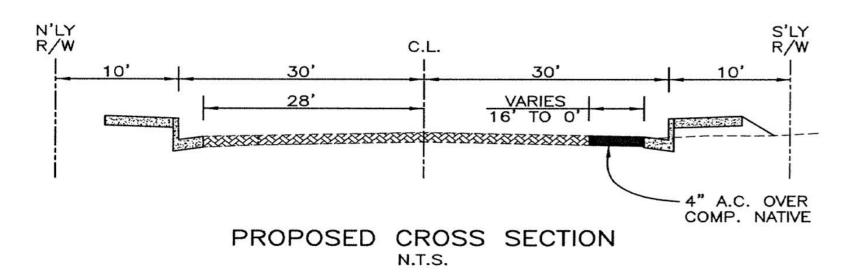

Improved within the existing 80 foot right of way.

Eighty (80') feet will allow for:

- four lanes of traffic,
- a painted median with turn pockets,
- no on-street parking, and
- no shoulder.




Project Budget

• Project Total Cost (Estimated)= \$ 1,663,295.00

Active Transportation Program (ATP) Cycle 3 will fund a total of \$776,000

 Local match and non-reimbursement eligible costs are funded through a transfer of funds from Fund 524, Measure I.



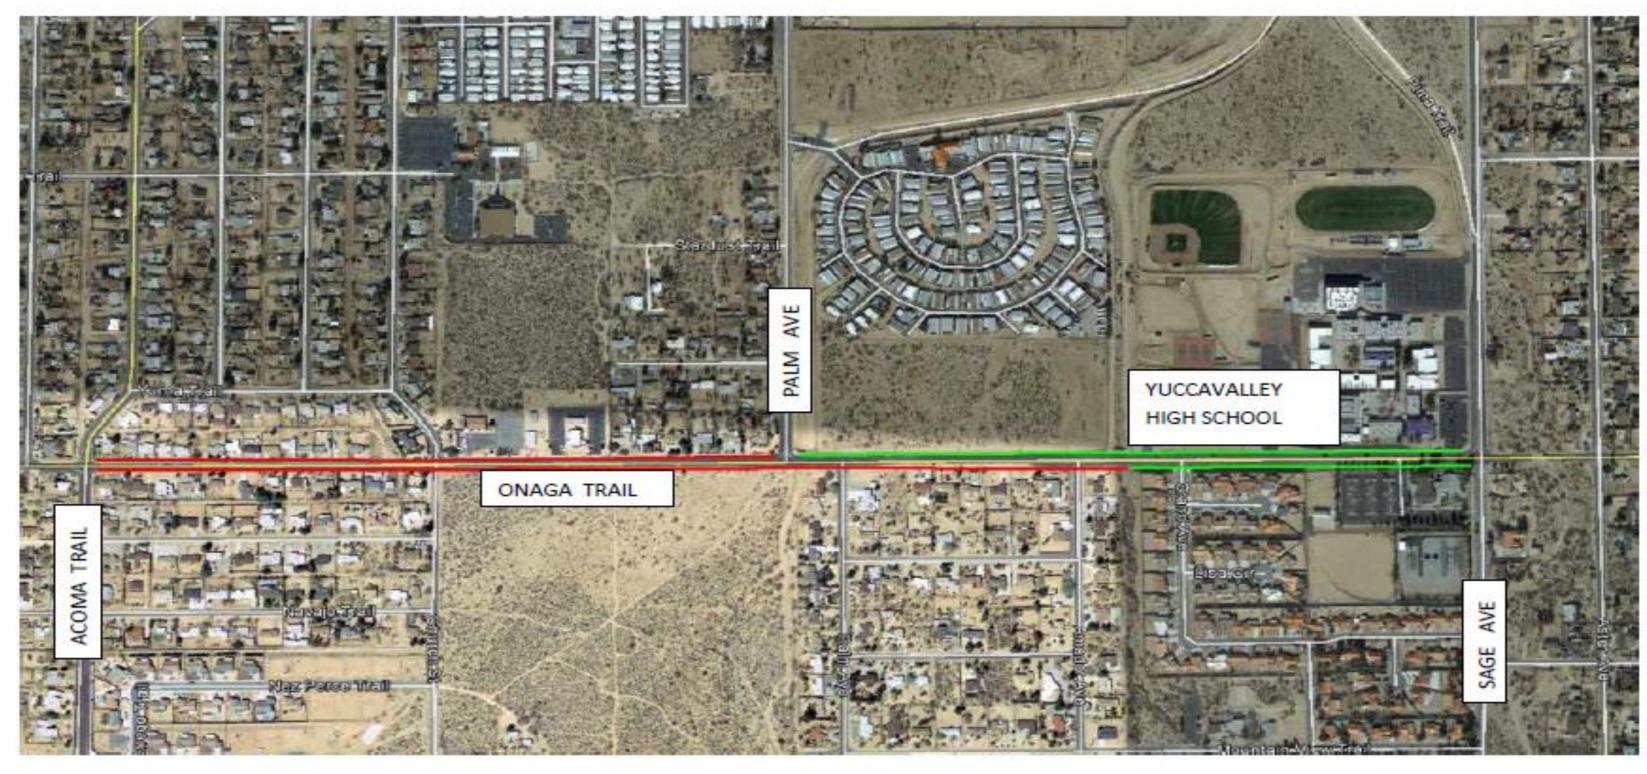



Town Project No. 8970-2020

ATP No. 5466(024)





Project Description

- The project is located on Little League Drive between Palm Avenue and Sage Avenue.
- The Project consists of constructing curb and gutter, sidewalk, handicap ramps, driveways, and signing and striping.
- Majority of the work will occur on the south side of the roadway.
- No widening of the road will occur in locations with existing curb and gutter.
 However, curb ramps at the intersections may need to be installed/retrofitted.



Proposed Improvements

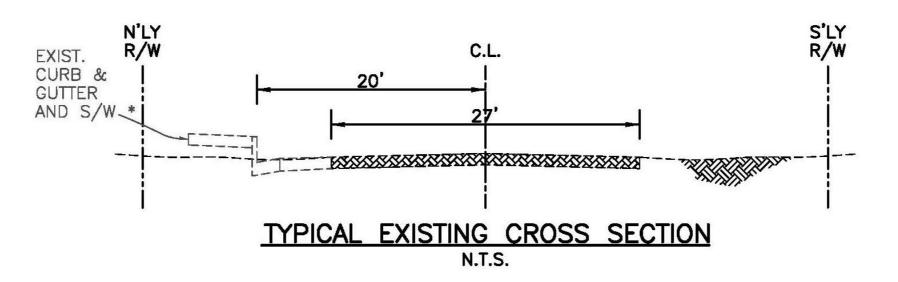

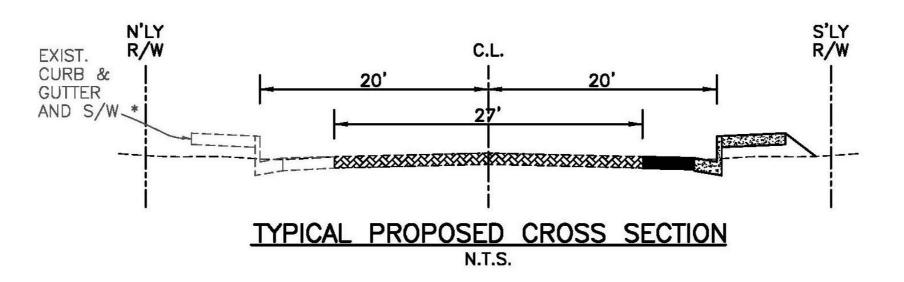




Project Budget

Project Total Cost (Estimated)= \$957,750.00

Active Transportation Program (ATP) Cycle 3 will fund a total of \$622,400

 Local match and non-reimbursement eligible costs are funded through a transfer of funds from Fund 524, Measure I.



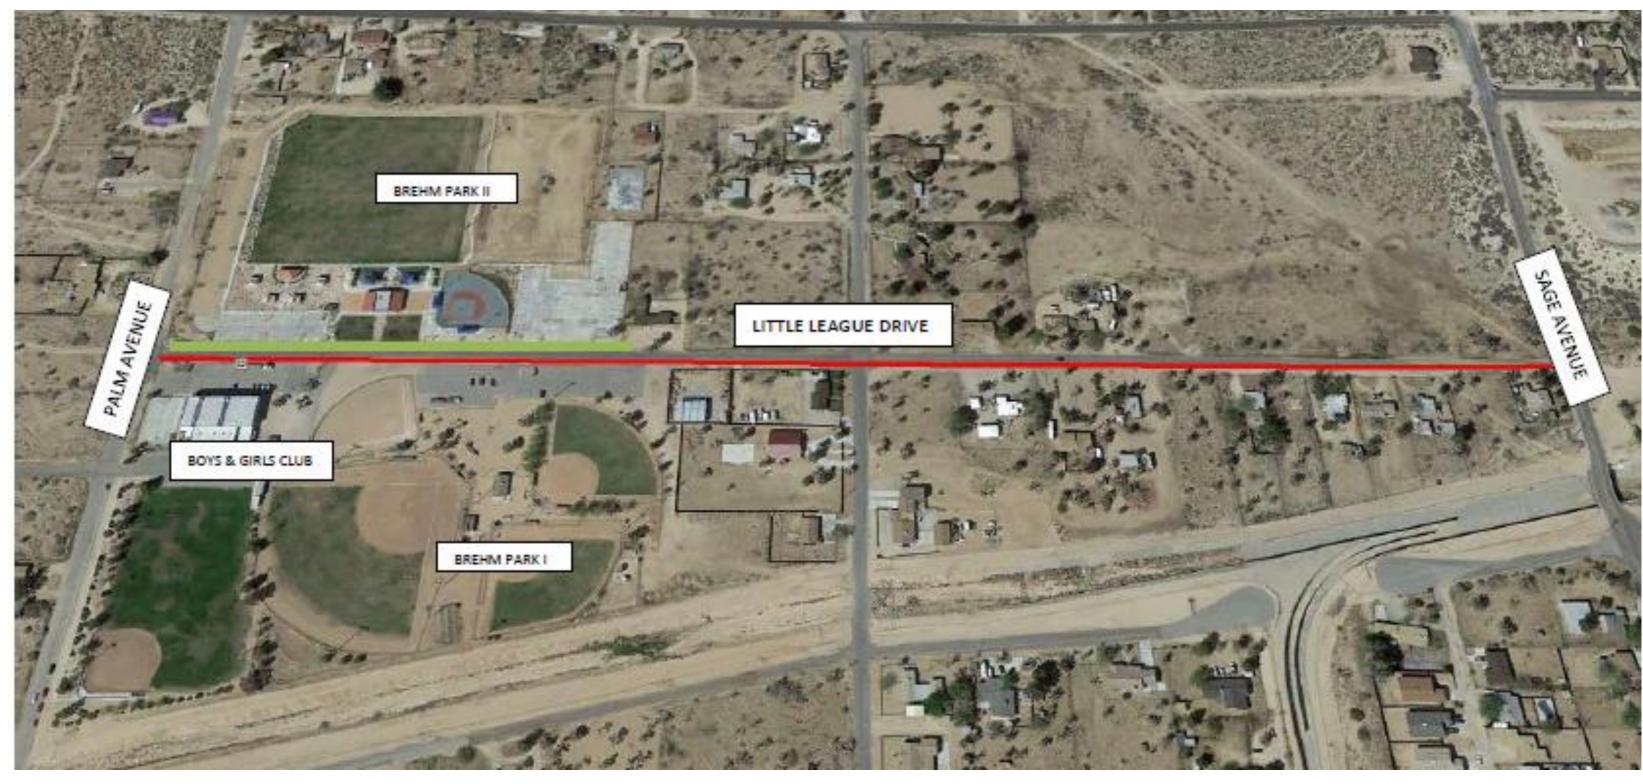



ATP Projected Construction Schedule

Bid the project: Estimated April/May through June/July 2022

Construction: Estimated August through October 2022

* SR-62 Asphalt Overlay may offset the schedule.

**All subject to Caltrans approvals and Caltrans timelines.

A VALLET CA VALL

Next Steps

- Public Outreach
- Joshua Tree Relocation/Removal
- Complete Plans and Specifications
- Caltrans Authorization to bid
- Town Council approval to bid project
- Bid the project
- Award Contract
- Estimated Construction August Through October 2022.



Questions (Following Public Comment)